


NOTES-  
 IF ROOT COLLAR  
 IS NOT EXPOSED,  
 REMOVE SOIL FROM  
 TOP OF ROOT BALL  
 UNTIL TRUNK FLARE  
 IS LOCATED. FINISHED  
 GRADE SHALL BE SET  
 AT THE BOTTOM OF  
 THE FLARE AS SHOWN

FOR ROOT BALL - WHEN  
 SYNTHETIC BURLAP IS USED  
 REMOVE COMPLETELY BEFORE  
 PLANTING TREE. WHEN WIRE CAGE  
 IS USED TOP 1/3 OF CAGE SHALL  
 BE CUT AND REMOVED.

DURING BACKFILLING, MACROTABS  
 AND MYCORRHIZAL INNOCLANT  
 BY PLANT HEALTH CARE INC.,  
 440 WILLIAM PITT WAY  
 PITTSBURGH, PA 15238  
 412 826-5445,  
 OR APPROVED EQUAL  
 SHALL BE MIXED INTO THE TOP 8"  
 OF TOPSOIL MIXTURE, FOLLOWING  
 MANUFACTURER'S INSTRUCTIONS.  
 SEE SPECS.

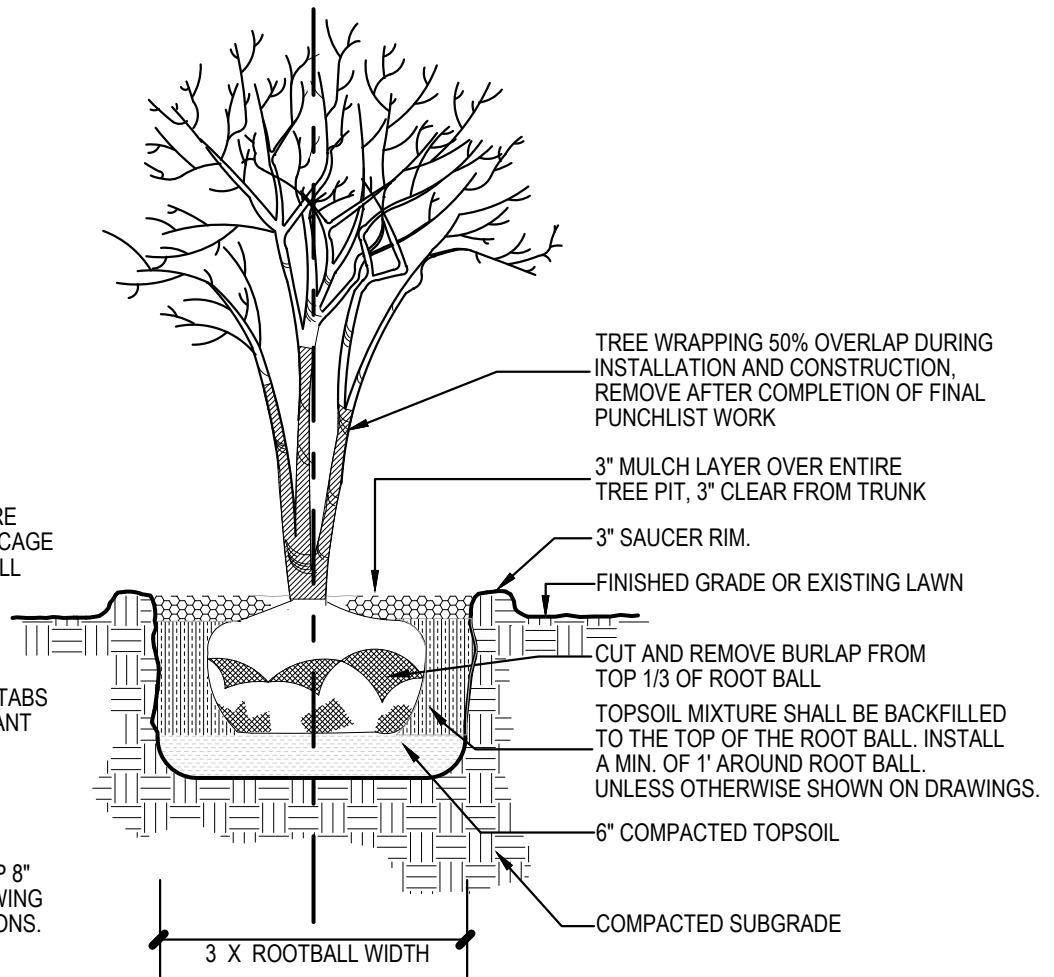

New York City Housing Authority  
 Capital Projects Division  
 Design Department  
 90 Church Street, 10th Floor  
 New York, NY 10007

Title:

**MULTI-TRUNK ( Minor )  
 TREE PLANTING**

Contract Name:

**GROUNDS REQUIREMENT**

Contract No.

**GD XXXXXXX**

Drawn by:  
 G. SOUKAS

Checked by:  
 K. MARSHAL

Scale:

**Not to Scale**

Date:

**January 2017**

Drawing No.

**PLT- 02**