


IF ROOT COLLAR IS NOT EXPOSED, REMOVE SOIL FROM TOP OF ROOT BALL UNTIL STEM FLARE IS LOCATED. FINISHED GRADE SHALL BE SET AT THE BOTTOM OF THE FLARE AS SHOWN

3" CONTINUOUS SAUCER RIM, (ON SLOPING BEDS RIM SHALL FOLLOW LOWER SLOPE OF BED)

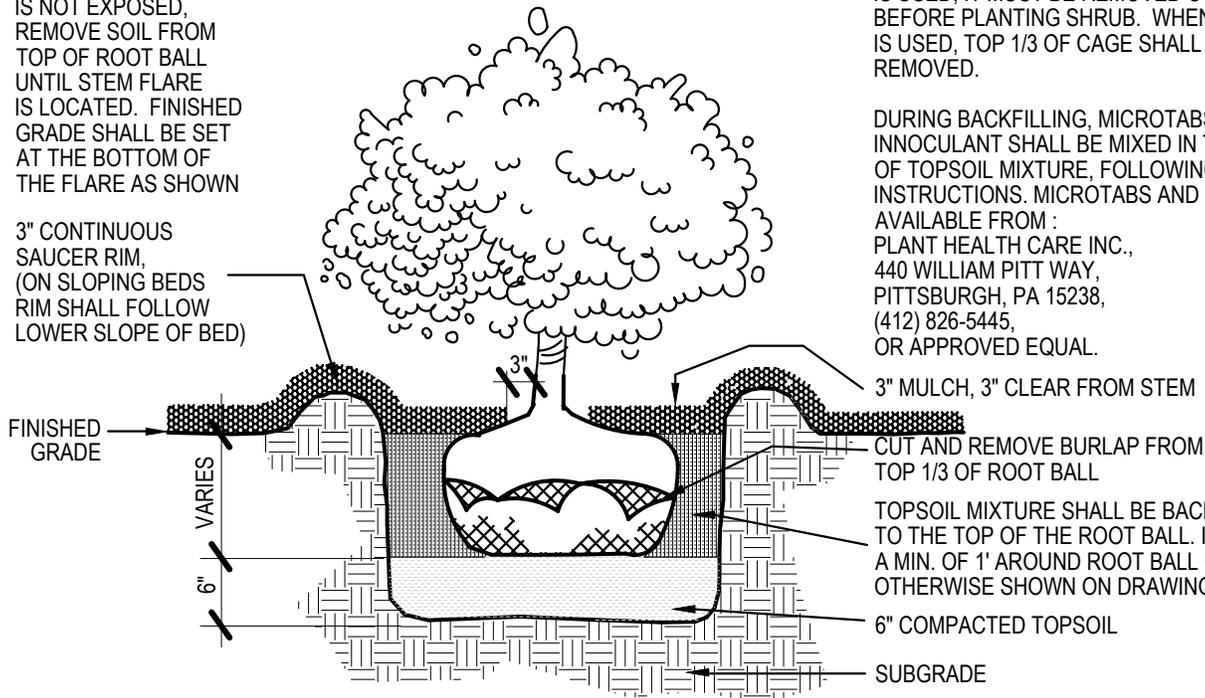

NOTES-
FOR ROOT BALL - WHEN SYNTHETIC BURLAP IS USED, IT MUST BE REMOVED COMPLETELY BEFORE PLANTING SHRUB. WHEN WIRE CAGE IS USED, TOP 1/3 OF CAGE SHALL BE CUT AND REMOVED.

DURING BACKFILLING, MICROTABS AND MYCORRHIZAL INNOCULANT SHALL BE MIXED IN TO THE TOP 8 INCHES OF TOPSOIL MIXTURE, FOLLOWING MANUFACTURER'S INSTRUCTIONS. MICROTABS AND INNOCULANT ARE AVAILABLE FROM :
PLANT HEALTH CARE INC.,
440 WILLIAM PITT WAY,
PITTSBURGH, PA 15238,
(412) 826-5445,
OR APPROVED EQUAL.

CUT AND REMOVE BURLAP FROM TOP 1/3 OF ROOT BALL

TOPSOIL MIXTURE SHALL BE BACKFILLED TO THE TOP OF THE ROOT BALL. INSTALL A MIN. OF 1" AROUND ROOT BALL UNLESS OTHERWISE SHOWN ON DRAWINGS.

6" COMPACTED TOPSOIL

SUBGRADE

NOTES -

FOR ALL AREAS INDICATED ON CONTRACT DRAWINGS AS HEDGE TRENCHES OR MASSES SHRUB BEDS, THE ENTIRE TRENCH/BED SHALL BE EXCAVATED TO A DEPTH OF AT LEAST 12" AND BACKFILLED WITH TOPSOIL AS PER SPECIFICATIONS. AFTER PLANTING IS COMPLETE, MULCH SHALL BE SPREAD TO A UNIFORM DEPTH OF 3" ON THE SURFACE OF PLANTING PITS, ENTIRE PLANTING BEDS AND/OR HEDGE TRENCHES, LEAVING 3" CLEAR FROM THE PLANTS TRUNK OR STEM.



New York City Housing Authority
Capital Projects Division
Design Department
90 Church Street, 10th Floor
New York, NY 10007

Title:

SHRUB PLANTING

Contract Name:

GROUNDS REQUIREMENT

Contract No.

GD XXXXXXX

Drawn by:
G. SOUKAS

Checked by:
K. MARSHAL

Scale:

Not to Scale

Date:

January 2017

Drawing No.

PLT- 01