


TREE SHALL BE LIMBED UP TO 6'-0" EXCEPT IN PEDESTRIAN AND VEHICULAR AREAS WHERE TREE SHALL BE LIMBED UP TO 7'-0"

IF ROOT COLLAR IS NOT EXPOSED, REMOVE SOIL FROM TOP OF ROOT BALL UNTIL TRUNK FLARE IS LOCATED. FINISHED GRADE SHALL BE SET AT THE BOTTOM OF THE FLARE AS SHOWN

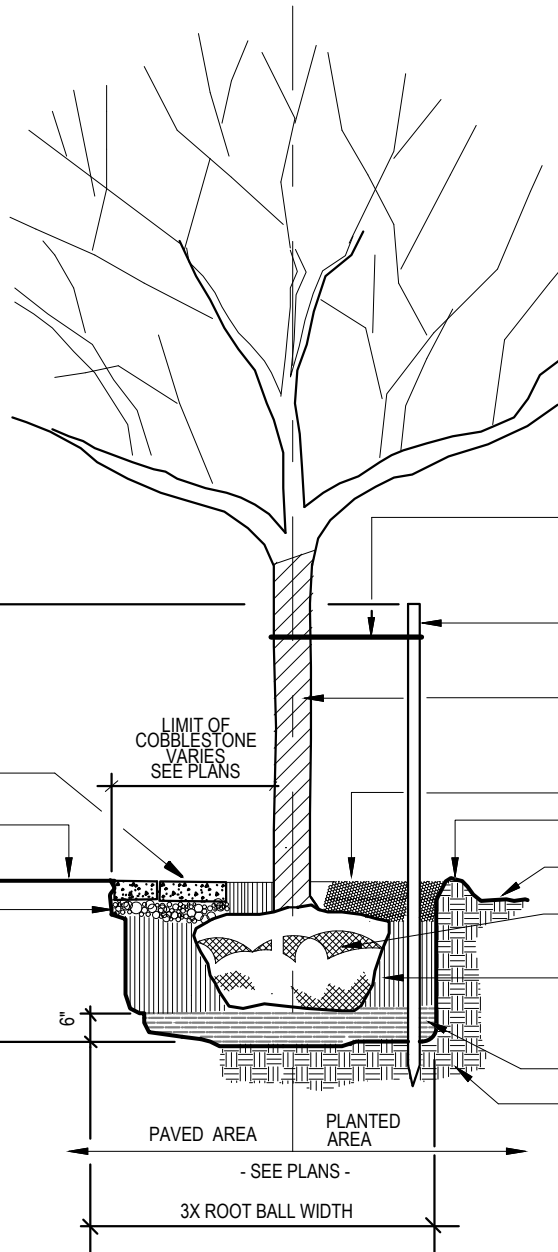

NOTES-

FOR ROOT BALL - WHEN SYNTHETIC BURLAP IS USED REMOVE COMPLETELY BEFORE PLANTING TREE. WHEN WIRE CAGE IS USED TOP 1/3 OF CAGE SHALL BE CUT AND REMOVED.

DURING BACKFILLING, MACROTABS AND MYCORRHIZAL INOCULANT BY PLANT HEALTH CARE INC., 440 WILLIAM PITT WAY PITTSBURGH, PA 15238 412 826-5445, OR APPROVED EQUAL SHALL BE MIXED INTO THE TOP 8" OF TOPSOIL MIXTURE, FOLLOWING MANUFACTURER'S INSTRUCTIONS. SEE SPECS.

1" CHAIN LOCK TREE TIE BY AMERICAN ARBORIST SUPPLIES INC. 1 800 441-8381 OR APPROVED EQUAL

CEDAR STAKE, 8'-0" LONG 3" DIA. - SEE SPECS FOR NUMBER REQUIRED  
TREE WRAPPING 50% OVERLAP DURING INSTALLATION AND CONSTRUCTION, REMOVE AFTER COMPLETION OF FINAL PUNCHLIST WORK

3" MULCH, 3" CLEAR FROM TRUNK  
3" SAUCER RIM

FINISHED GRADE  
CUT AND REMOVE BURLAP FROM TOP 1/3 OF ROOT BALL

TOPSOIL MIXTURE SHALL BE BACKFILLED TO THE TOP OF THE ROOT BALL. INSTALL A MIN. OF 1' AROUND ROOT BALL UNLESS OTHERWISE SHOWN ON DRAWINGS.

6" COMPACTED TOPSOIL  
SUBGRADE



New York City Housing Authority  
Capital Projects Division  
Design Department  
90 Church Street, 10th Floor  
New York, NY 10007

Title:

**TREE PLANTING-Cobblestone  
Tree Pit or Planted Area**

Contract Name:

**GROUNDS REQUIREMENT**

Contract No.

**GD XXXXXXX**

Drawn by:  
**G. SOUKAS**

Checked by:  
**K. MARSHAL**

Scale:

**Not to Scale**

Date:

**January 2017**

Drawing No.

**PLT- 03**