

MALLEABLE OR CAST
IRON SCREW CAP
SEE SPECIFICATIONS

AS NECESSARY, SEE PLANS
FOR STEEL 5/8" U-BOLT,
WELD COMPLETE
GROUND SMOOTH


5" NOMINAL DIA. SCHEDULE 80
STEEL PIPE FILL WITH CONCRETE.
PAINT PIPE AND CAP "SAFETY
YELLOW"-SEE SPECIFICATIONS.

FINISHED GRADE

FULL DEPTH PAVEMENT
OR PLANTED AREA-
SEE PLANS


CONCRETE FOOTING

DRY, FIRM,
UNYIELDING SUBGRADE

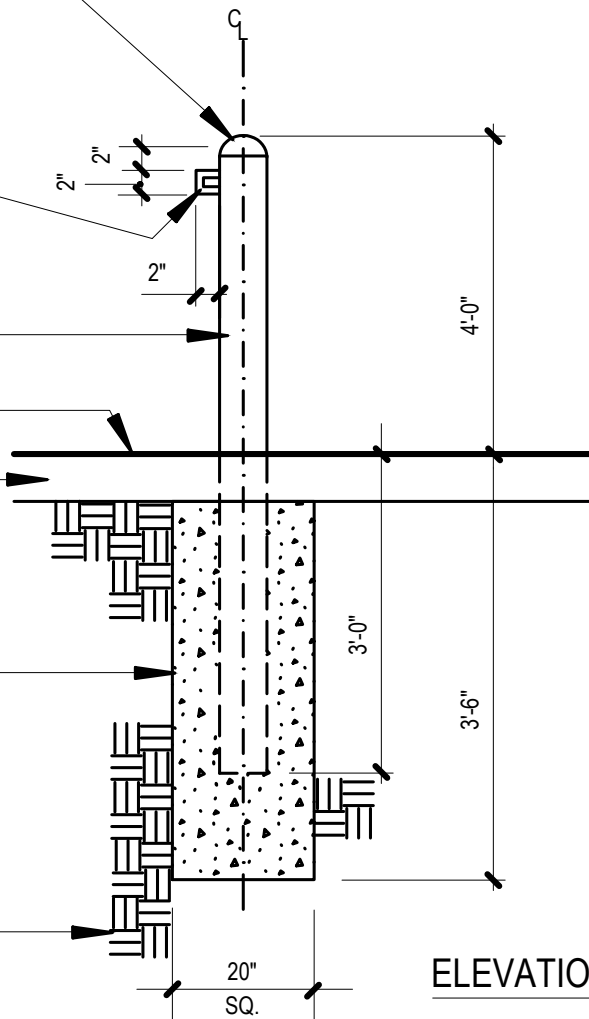

ELEVATION SECTION

NOTE: WHEN INSTALLING BOLLARD IN
EXISTING PAVEMENT, SAW CUT A 12"
SQUARE IN PAVEMENT AND PATCH WITH
APPROPRIATE MATERIAL AFTER
INSTALLATION. ONLY PROVIDE "U" BOLTS
ON BOLLARDS LOCATED AS PAIRS, ALSO
PROVIDE APPROPRIATE LENGTH OF 3/8"
STRAIGHT LINK GALVANIZED CHAIN AND
CORRECT NUMBER OF PADLOCKS, IF
CALLED FOR ON THE DRAWINGS-SEE SPECS.

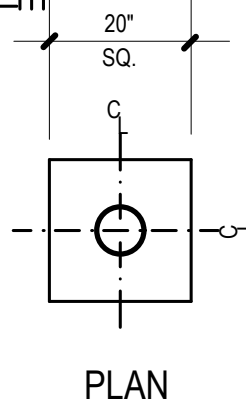

PLAN



New York City Housing Authority
Capital Projects Division
Design Department
90 Church Street, 10th Floor
New York, NY 10007

Title:

FIXED STEEL BOLLARD

Contract Name:

GROUNDS REQUIREMENT

Contract No.

GD XXXXXXX

Drawn by:
G. SOUKAS

Checked by:
K. MARSHAL

Scale:

Not to Scale

Date:

January 2017

Drawing No.

AME- 04