


NOTE-
 SAWCUT ALL EDGES
 OF BREAKS AND
 FISSURES IN CONCRETE.
 ALL EDGES SHALL BE
 PLUMB AND SQUARE.
 ALL SHALL BE 1/2" MIN.


PRODUCTS FOR PATCHING PLATFORMS, STEPS, AND WALLS-
 * "CONCRESE LPL LIQUID" for waterproof bonding of fresh, wet concrete to hardened concrete.
 * "10-60 RAPID MORTAR" for filling and sealing horizontal concrete.
 * "HBA MORTAR REPAIR" for filling and sealing vertical concrete.
 ALL AS MANUFACTURED BY BASF CONSTRUCTION CHEMICALS, LLC
 1.800.526.1072, OR APPROVED EQUAL.
 LOCAL REP IS PHIL CATALANO 1.718.667.6121.

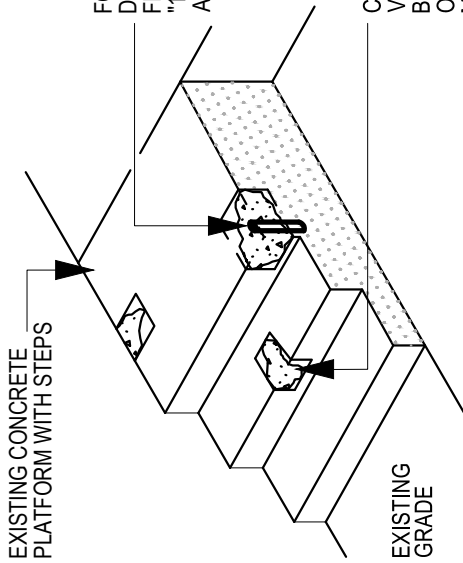

FOR SOLID FENCE POST - CORE
 DRILL, REMOVE COMPLETE AND
 FILL RESULTANT HOLE WITH
 "10-60 RAPID MORTAR" OR
 APPROVED EQUAL.

CLEAN OUT ALL CRACKS AND
 VOIDS. SURFACE CRACKS SHALL
 BE VEE-D-OUT 1/4" EACH SIDE.
 OF CRACK TO A DEPTH OF 1/2"
 MINIMUM, 2" MAXIMUM. REPAIR
 WITH "10-60 RAPID MORTAR".
 IF GREATER THAN 2" DEEP, USE
 "EPOXY ADHESIVE 24LPL" WITH
 CONCRETE PAVEMENT AS PER
 SPECS. IF LESS THAN 1/2",
 SAW-CUT TO 1/2" MIN.

PLATFORM AND STEPS

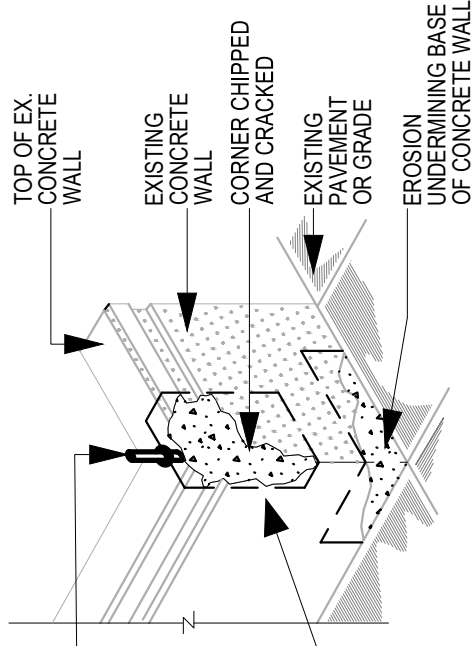

CONCRETE WALL



New York City Housing Authority
 Capital Projects Division
 Design Department
 90 Church Street, 10th Floor
 New York, NY 10007

Title:

**CONCRETE PATCHING -
 Wall, Stair & Platform**

Contract Name:

GROUNDS REQUIREMENT

Contract No.

GD XXXXXXX

Drawn by:
 G. SOUKAS

Checked by:
 K. MARSHAL

Scale:

Not to Scale

Date:

January 2017

Drawing No.

MIS- 03