

NOTES



GRANITE BLOCK PAVERS SHALL BE CLEAN USED PAVING BLOCKS SALVAGED FROM THIS PROJECT. ADDITIONAL PAVERS AND/OR ALL NEW PAVERS, IF REQUIRED, SHALL BE SUPPLIED BY CONTRACTOR.

FLEXIBLE BASE

GRANITE BLOCK PAVERS SHALL BE SET ON A 2" THICK CLEAN FINE SAND SETTING BED, FLUSH WITH SURROUNDING PAVEMENT. SPACES BETWEEN THE BLOCKS MAY VARY BETWEEN A MINIMUM OF 1/4" TO A MAXIMUM OF 1". AFTER ALL THE GRANITE BLOCK PAVERS HAVE BEEN SET, CLEAN FINE SAND SHALL BE SWEEPED INTO THE JOINTS, LOCKING THE JOINTS TOGETHER. AFTER SWEEPING, THE ENTIRE AREA SHALL BE GENTLY MISTED WITH WATER. THIS ENTIRE PROCESS SHALL THEN BE REPEATED UNTIL NO FURTHER SETTLING OCCURS.

RIGID BASE

GRANITE BLOCK PAVERS SHALL BE SET ON A 2" THICK DRY MIX SETTING BED, CONSISTING OF EQUAL PARTS FINE SAND AND CEMENT, FLUSH WITH SURROUNDING PAVEMENT. SPACES BETWEEN THE BLOCKS MAY VARY BETWEEN A MINIMUM OF 1/4" TO A MAXIMUM OF 1". AFTER ALL THE GRANITE BLOCKS HAVE BEEN SET, A DRY MIX OF FINE SAND AND CEMENT SHALL BE SWEEPED INTO THE JOINTS, LOCKING THE JOINTS TOGETHER. AFTER SWEEPING, THE ENTIRE AREA SHALL BE GENTLY MISTED WITH WATER. THIS ENTIRE PROCESS SHALL THEN BE REPEATED UNTIL NO FURTHER SETTLING OCCURS.

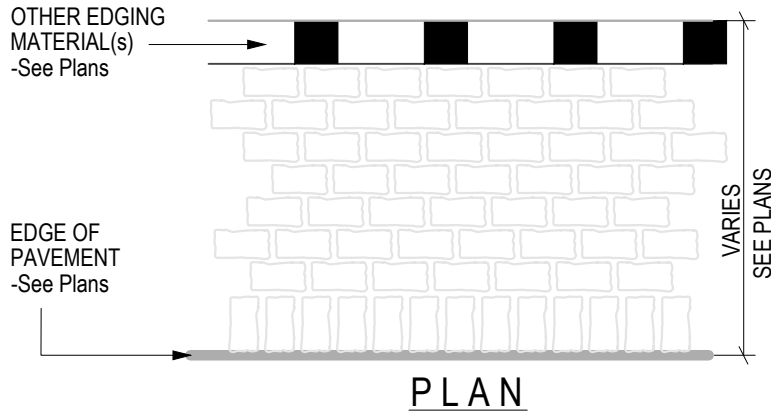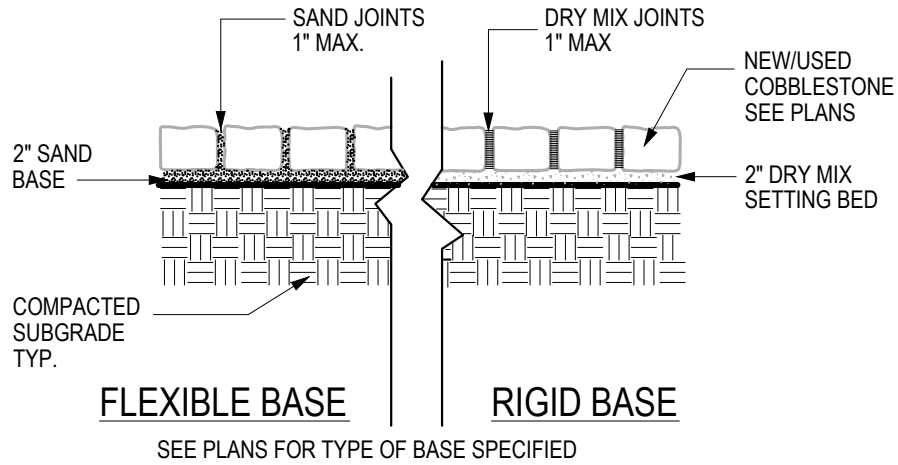

PLAN



New York City Housing Authority  
 Capital Projects Division  
 Design Department  
 90 Church Street, 10th Floor  
 New York, NY 10007

Title:

**GRANITE BLOCK PAVERS**  
*on Flexible or Rigid Base*

Contract Name:

**GROUNDS REQUIREMENT**

Contract No.

**GD XXXXXXX**

Drawn by:  
 G. SOUKAS

Checked by:  
 K. MARSHAL

Scale:

**Not to Scale**

Date:

**January 2017**

Drawing No.

**PAV- 14**