


CLEAN OUT ALL CRACKS AND VOIDS. SURFACE CRACKS SHALL BE VEED-OUT 1/4" EACH SIDE OF CRACK TO A DEPTH OF 1/2" MIN. REPAIR WITH "10-60 RAPID MORTAR" OR APPROVED EQUAL.

EXISTING CONCRETE CURB

FOR SOLID FENCE POST: CORE DRILL, REMOVE COMPLETE AND FILL RESULTANT HOLE WITH "10-60 RAPID MORTAR" OR APPROVED EQUAL.

EXISTING/NEW GRADE

CORNER CHIPPED AND CRACKED

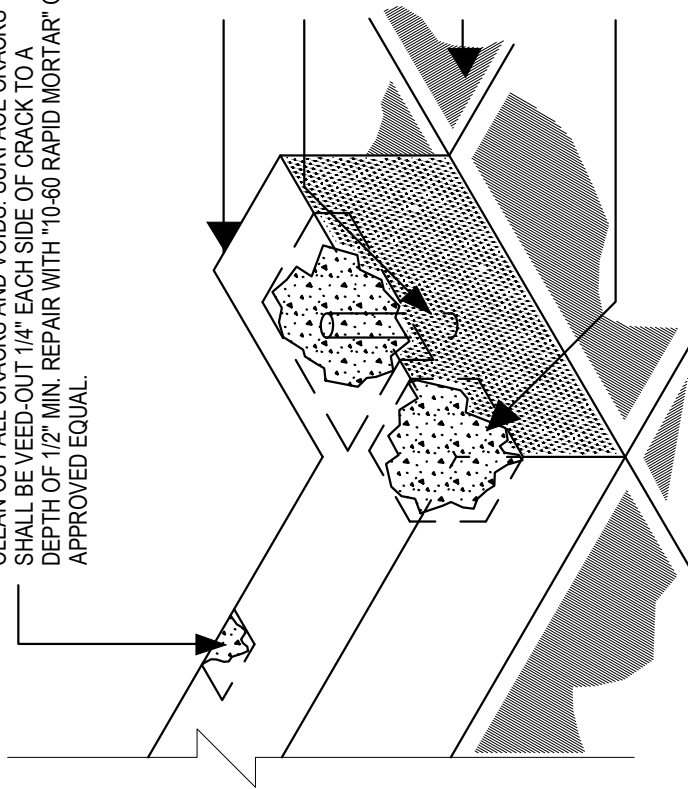

NOTE: SAW-CUT ALL EDGES OF BREAKS AND FISSURES IN CONCRETE. ALL EDGES SHALL BE PLUMB AND SQUARE.

CONCRETE CURB

NOTE: PRODUCTS FOR PATCHING CONCRETE CURBS:

"CONCRESE LPL LIQUID" FOR WATERPROOF BONDING OF FRESH WET CONCRETE TO HARDENED CONCRETE.

"10-60 RAPID MORTAR" FOR FILLING AND SEALING HORIZONTAL CONCRETE.

"HB-A REPAIR MORTAR" FOR FILLING AND SEALING VERTICAL CONCRETE.

ALL AS MANUFACTURED BY BASF CONSTRUCTION CHEMICALS, LLC
1.800.526.1072 OR APPROVED EQUAL.

LOCAL REP IS PHIL CATALANO 1.718.667.6121.



New York City Housing Authority
Capital Projects Division
Design Department
90 Church Street, 10th Floor
New York, NY 10007

Title:

CONCRETE PATCHING CONCRETE CURB

Contract Name:

GROUNDS REQUIREMENT

Contract No.

GD XXXXXXX

Drawn by:

G. SOUKAS

Checked by:

K. MARSHAL

Scale:

Not to Scale

Date:

January 2017

Drawing No.

MIS- 02